


Layout Studio® Project Table

One or two duplexes per opening. One duplex= two places to plug in.



EN-TAL industries. Layout Studio hardwire details.

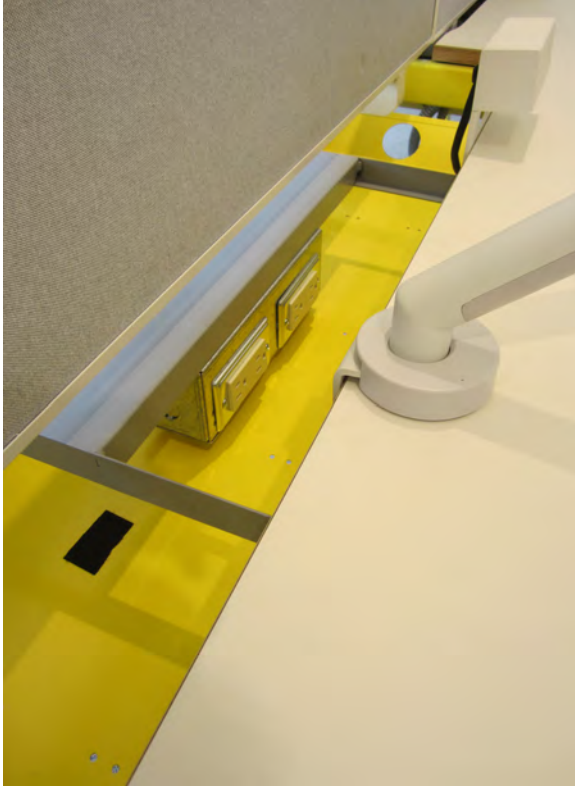

L-101D-LS box mounts to Herman Miller GNPA.D bracket as shown using *

2 pcs 1/4-20X 1 1/4" bolts

4 pcs 1/4" nuts

4 pcs 1/4" lock nuts

1. Separate two parts of GNPA.D bracket

2. Install two 1/4-20X 1 1/4" bolts as shown (FIG 2) securing with 1 lock washer and one nut each. This creates mounting studs for the box.

3. Re-assemble GNPA.D bracket.

4. Mount box to studs using 1 lock washer and one nut each stud.

Wire in accordance with local electrical codes.

Install cover on box with provided 10-32X3/16 screws.

GNPA.D bracket sets in furniture.(FIG 1)

Receptacle trim plates provided.

* updated Oct 2015: old stlye mounts using (4 #10 X 3/4" sms.) no longer in production

EN-TAL industries. Single sided Layout Studio hardwire details.



L-111-LS box mounts to A-117 bracket at required adjustable location on bracket using 3 10-32X3/16 THMS.



Bracket mounts to rear cross bar in desired location using 6 #8 X 1/2 dp screws. For use with access flap installation. Using single sided(blank one opening), one left and/or one right with the center of the access area open for user is recommended. Wire in accordance with local electrical codes.

Receptacle trim plates provided.