


## EN-TAL industries. Canvas Channel installation details (soft tiles)\*\*\*



Mount first half of bracket to the frame using 4 #8X1/2" hex head screws. **If these are on the lower bar it is important to mount these before the frames are stood.** Bracket should be aligned offset from the pair of power openings.

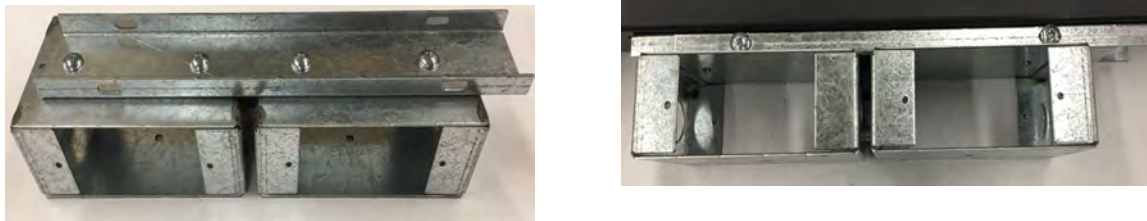

Mount one or two boxes to second bracket as necessary using 10-32X3/16 THMS and box to box connector.

Align both brackets so receptacle openings align with the receptacle openings on the skin/tile. Tighten screws.



Wire in accordance with local electrical codes.  
Install receptacles and tiles.

Using a box with an L-109K blank feeds may enter the furniture through an un-used opening.



\*\*\*For Metal tiles see separate instructions.